

Shallow Analysis: Light Parsing & Named Entity Extraction

Stephan Busemann
LT lab, DFKI

(based on slides by
Günter Neumann, Steven Bird, Karin Haenelt)

LT Components

Lexical / Morphological Analysis

Tagging

Chunking

Syntactic Analysis

Grammatical Relation Finding

Named Entity Recognition


Word Sense Disambiguation

Semantic Analysis

Reference Resolution

Discourse Analysis

Text



Meaning

Technologies

OCR

Spelling Error Correction

Grammar Checking

Information retrieval

Document Classification

Information Extraction

Summarization

Question Answering

Ontology Extraction and Refinement

Dialogue Systems

Machine Translation

Text

LT Components

Technologies

Lexical / Morphological Analysis

OCR

Spelling Error Correction

Grammar Checking

Information retrieval

Shallow Parsing

Named Entity Recognition

Document Classification

Information Extraction

Summarization

Word Sense Disambiguation

Question Answering

Semantic Analysis

Ontology Extraction and Refinement




Reference Resolution

Dialogue Systems

Discourse Analysis

Machine Translation

Meaning

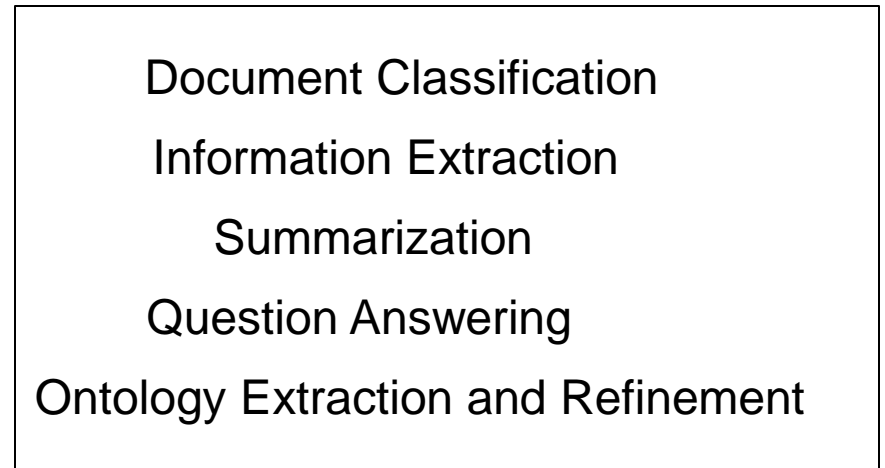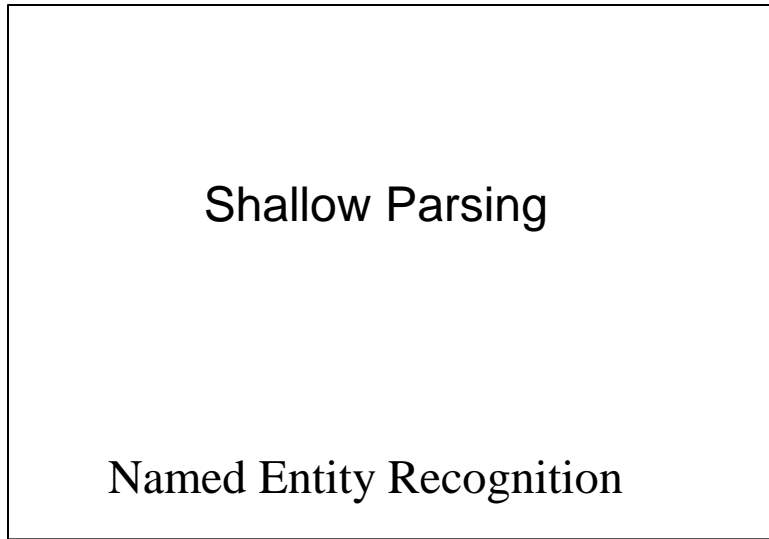

From POS tagging to IE

Classification-Based Approach

- POS tagging

The/Det woman/NN will/MD give/VB Mary/NNP a/Det book/NN

- NP chunking

The/NP1 woman/NP1 will/VP1 give/VP1 Mary/NP2 a/NP3 book/NP3

- Relation Finding

[NP1-SUBJ the woman] [VP1 will give] [NP2-OBJ1 Mary]
[NP3-OBJ2 a book]]

- Semantic Tagging = Information Extraction

[GIVER the woman][will give][GIVEE Mary][GIVEN a book]

- Semantic Tagging = Question Answering

Who will give Mary a book?

[GIVER ?][will give][GIVEE Mary][GIVEN a book]

Parsing of unrestricted text

- Complexity of parsing of unrestricted text
 - Robustness
 - Large sentences
 - Large data sources
 - Input texts are not simply sequences of word forms
 - Textual structure (e.g., enumeration, spacing, etc.)
 - Combined with structural annotation (e.g., XML tags)

Motivations for Parsing

- Why parse sentences in the first place?
- Parsing is usually an intermediate stage
 - Builds structures that are used by later stages of processing
- Full Parsing is a sufficient but not necessary intermediate stage for many NLP tasks.
- Parsing often provides more information than we need.

Light Parsing

Goal: assign a partial structure to a sentence.

- Simpler solution space
- Local context
- Non-recursive
- Restricted (local) domain

Output from Light Parsing

- What kind of partial structures should light parsing construct?
- Different structures useful for different tasks:
 - Partial constituent structure
[NP I] [VP saw [NP a tall man in the park]].
 - Prosodic segments
[I saw] [a tall man] [in the park].
 - Content word groups
[I] [saw] [a tall man] [in the park].

Chunk Parsing

Goal: divide a sentence into a sequence of chunks.

- Chunks are non-overlapping regions of a text
 [I] saw [a tall man] in [the park]
- Chunks are non-recursive
 - A chunk can not contain other chunks
- Chunks are non-exhaustive
 - Not all words are included in the chunks

Chunk Parsing Examples

- **Noun-phrase chunking:**
 - [I] saw [a tall man] in [the park].
- **Verb-phrase chunking:**
 - The man who [was in the park] [saw me].
- **Prosodic chunking:**
 - [I saw] [a tall man] [in the park].

Chunks and Constituency

Constituents: [[a tall man] [in [the park]]].

Chunks: [a tall man] in [the park].

- A constituent is part of some higher unit in the hierarchical syntactic parse
- Chunks are not constituents
 - Constituents are recursive
- But, chunks are typically sub-sequences of constituents
 - Chunks do not cross major constituent boundaries

1. [_{NP} [_{NP} G.K. Chesterton], [_{NP} [_{NP} author] of [_{NP} [_{NP} The Man] who was [_{NP} Thursday]]]]
2. [_{NP} G.K. Chesterton], [_{NP} author] of [_{NP} The Man] who was [_{NP} Thursday]

Chunk Parsing: Accuracy

Chunk parsing achieves higher accuracy than full parsing

- Smaller solution space
- Less word-order flexibility within chunks than between chunks
 - Fewer long-range dependencies
 - Less contextual dependence
- Better locality
- No need to resolve ambiguity
- Less error propagation

Chunk Parsing: Domain Specificity

Chunk parsing is less domain specific than full parsing

- Dependencies on lexical/semantic information tend to occur at levels “higher” than chunks:
 - Attachment
 - Argument selection
 - Movement
- Fewer stylistic differences with chunks

Psycholinguistic Motivations

Chunk parsing is psycholinguistically motivated

- Chunks are processing units
 - Humans tend to read texts one chunk at a time
 - Eye movement tracking studies
- Chunks are phonologically marked
 - Pauses
 - Stress patterns
- Chunking might be a first step in full parsing
 - Integration of shallow and deep parsing

Chunk Parsing: Efficiency

Chunk parsing is more efficient than full parsing

- Smaller solution space
- Relevant context is small and local
- Chunks are non-recursive
- Chunk parsing can be implemented with a finite state machine
 - Fast (linear)
 - Low memory requirement (no stacks)
- Chunk parsing can be applied to a very large text sources (e.g., the web)

Chunk Parsing Techniques

- Chunk parsers usually ignore lexical content
- Only need to look at part-of-speech tags
- Techniques for implementing chunk parsing
 - Regular expression matching
 - Chinking
 - Cascaded Finite state transducers

Regular Expression Matching

- Define a regular expression that matches the sequences of tags in a chunk
 - A simple noun phrase chunk regexp:
 - `<DT> ? <JJ> * <NN.??>`
- Chunk all matching subsequences:
 - In:
The /DT little /JJ cat /NN sat /VBD on /IN the /DT mat /NN
 - Out:
[The /DT little /JJ cat /NN] sat /VBD on /IN [the /DT mat /NN]
- If matching subsequences overlap, the first one gets priority
- Regular expressions can be cascaded

Chinking


- A chink is a subsequence of the text that is not a chunk.
- Define a regular expression that matches the sequences of tags in a chink.
 - A simple chink regexp for finding NP chunks:
(`<VB.??> | <IN>`)⁺
- Chunk anything that is not a matching subsequence:

the/DT little/JJ cat/NN sat/VBD on /IN the /DT mat/NN
[the/DT little/JJ cat/NN] sat/VBD on /IN [the /DT mat/NN]
chunk chink chunk


Syntactic Structure: Partial Parsing Approaches

- Finite-state approximation of sentence structures (Abney 1995)
 - finite-state cascades: sequences of levels of regular expressions
 - recognition approximation: tail-recursion replaced by iteration
 - interpretation approximation: embedding replaced by fixed levels
- Finite-state approximation of phrase structure grammars (Pereira/Wright 1997)
 - flattening of shift-reduce-recogniser
 - no interpretation structure (acceptor only)
 - used in speech recognition where syntactic parsing serves to rank hypotheses for acoustic sequences
- Finite-state approximation (Sproat 2002)
 - bounding of centre embedding
 - reduction of recognition capacity
 - flattening of interpretation structure


John's interesting
book with a nice cover

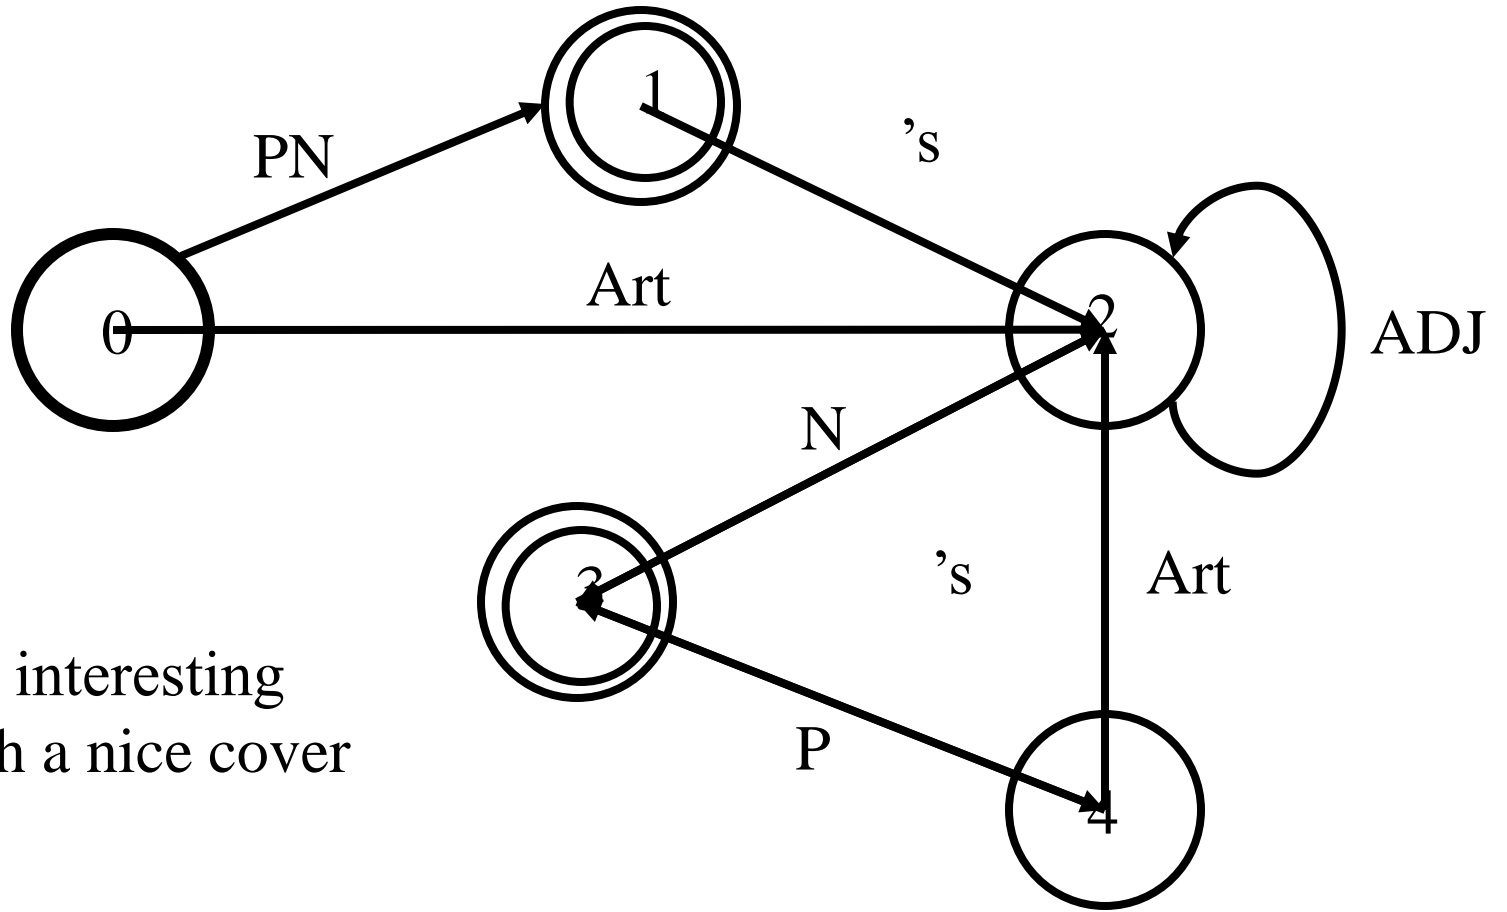


John's interesting
book with a nice cover

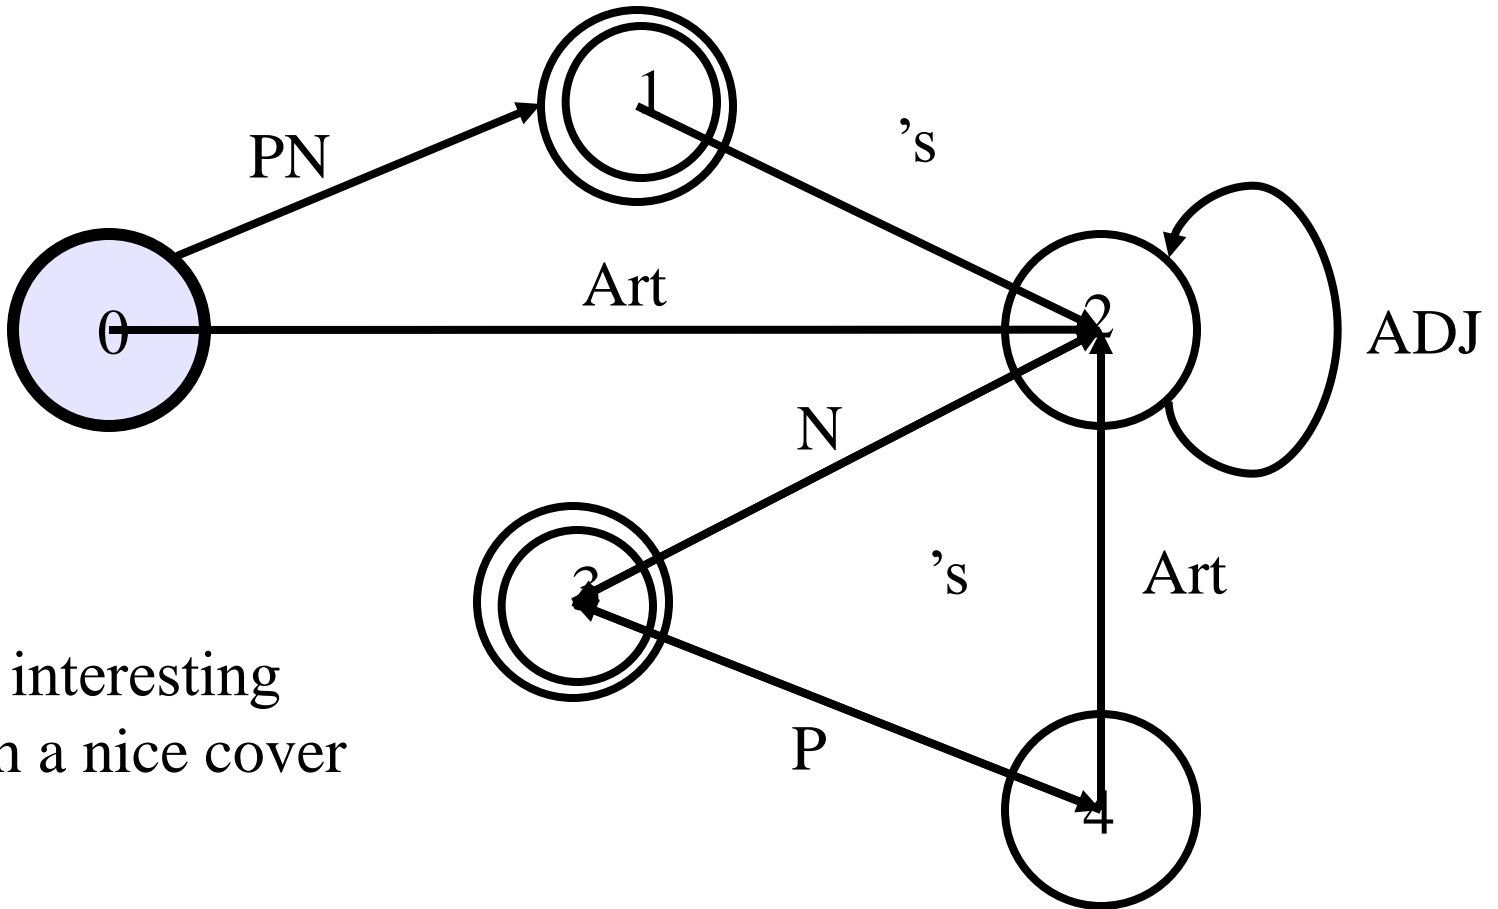


John's interesting
book with a nice cover

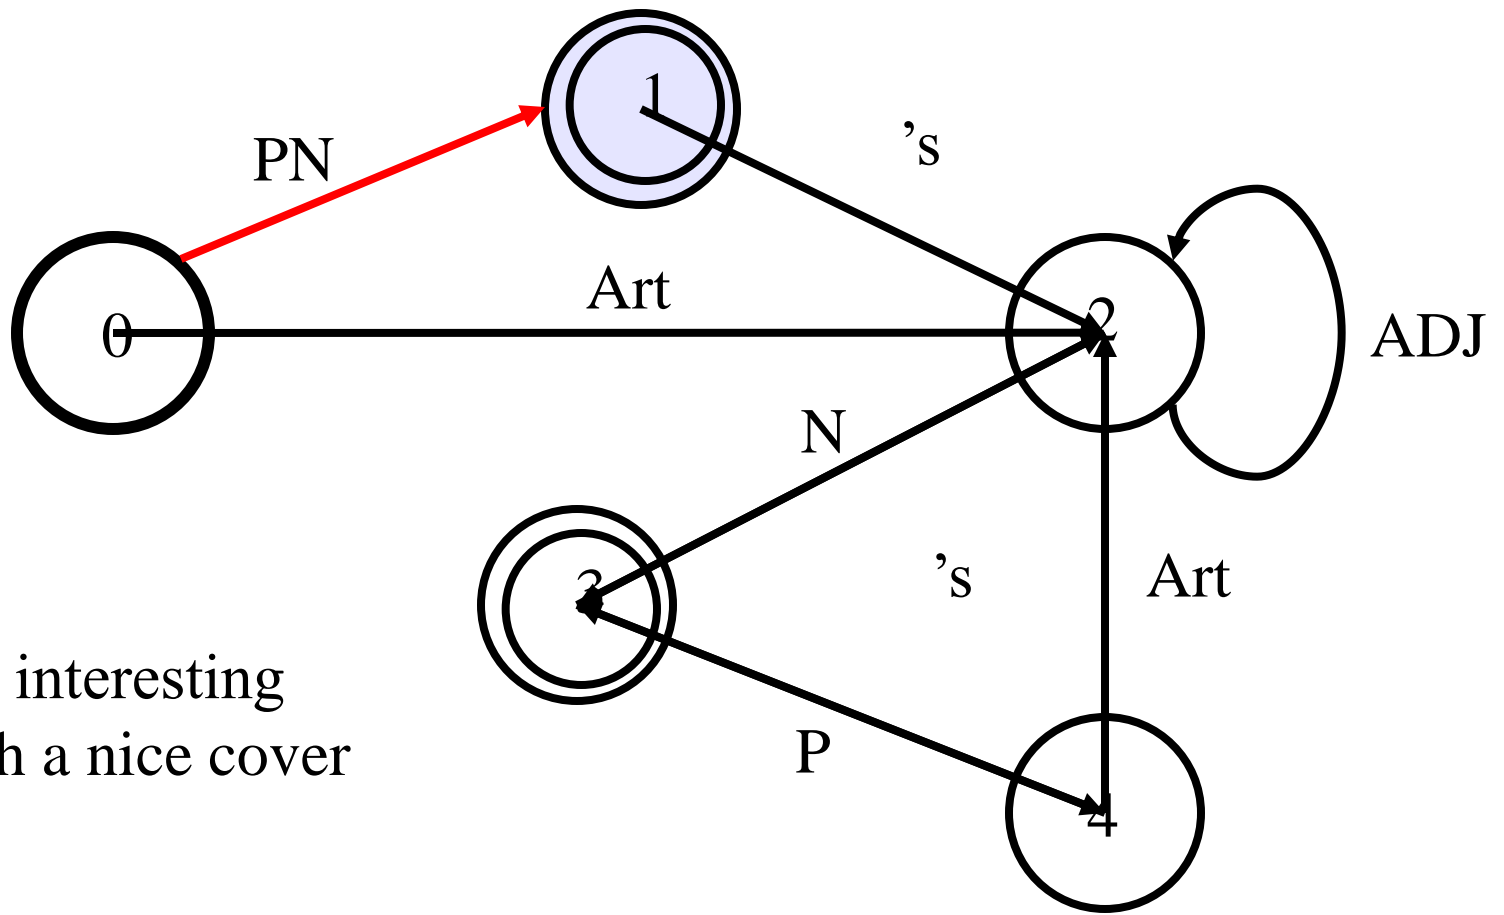


John's interesting
book with a nice cover

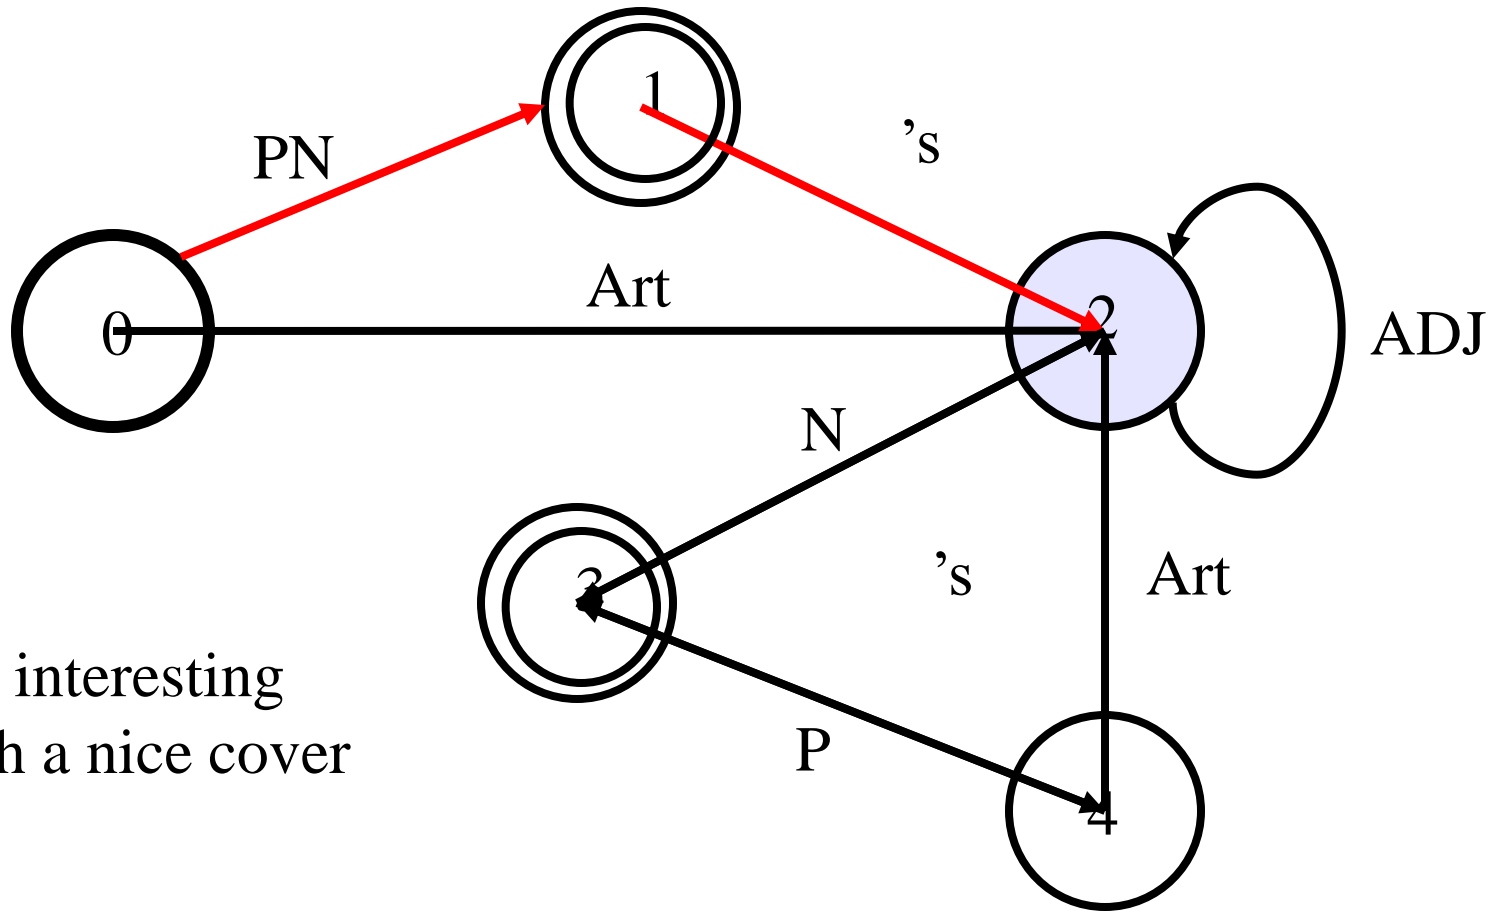


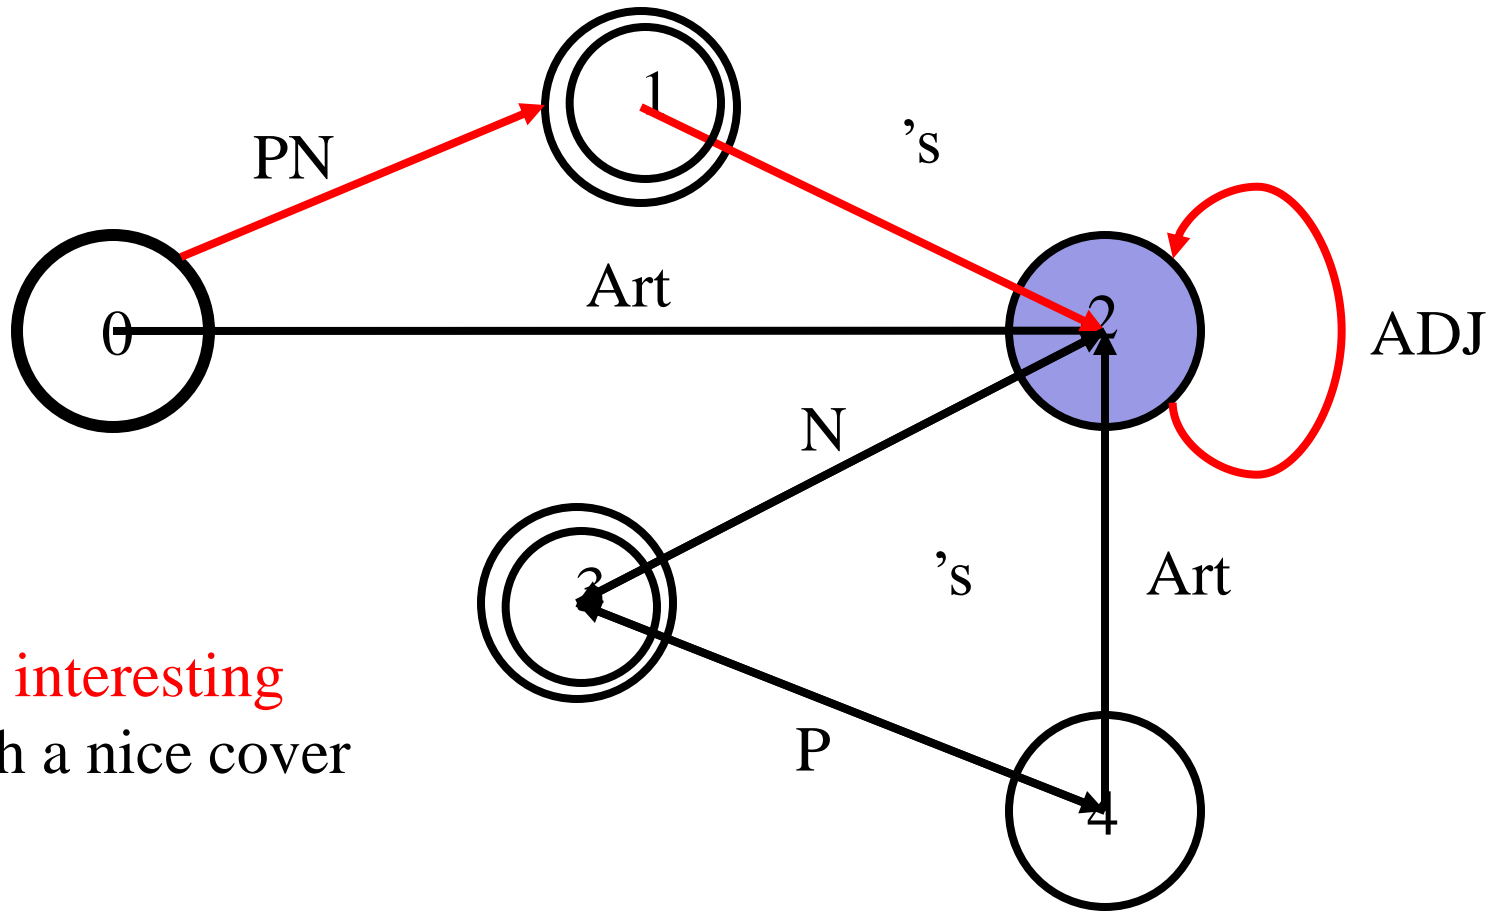


John's interesting
 book with a nice cover

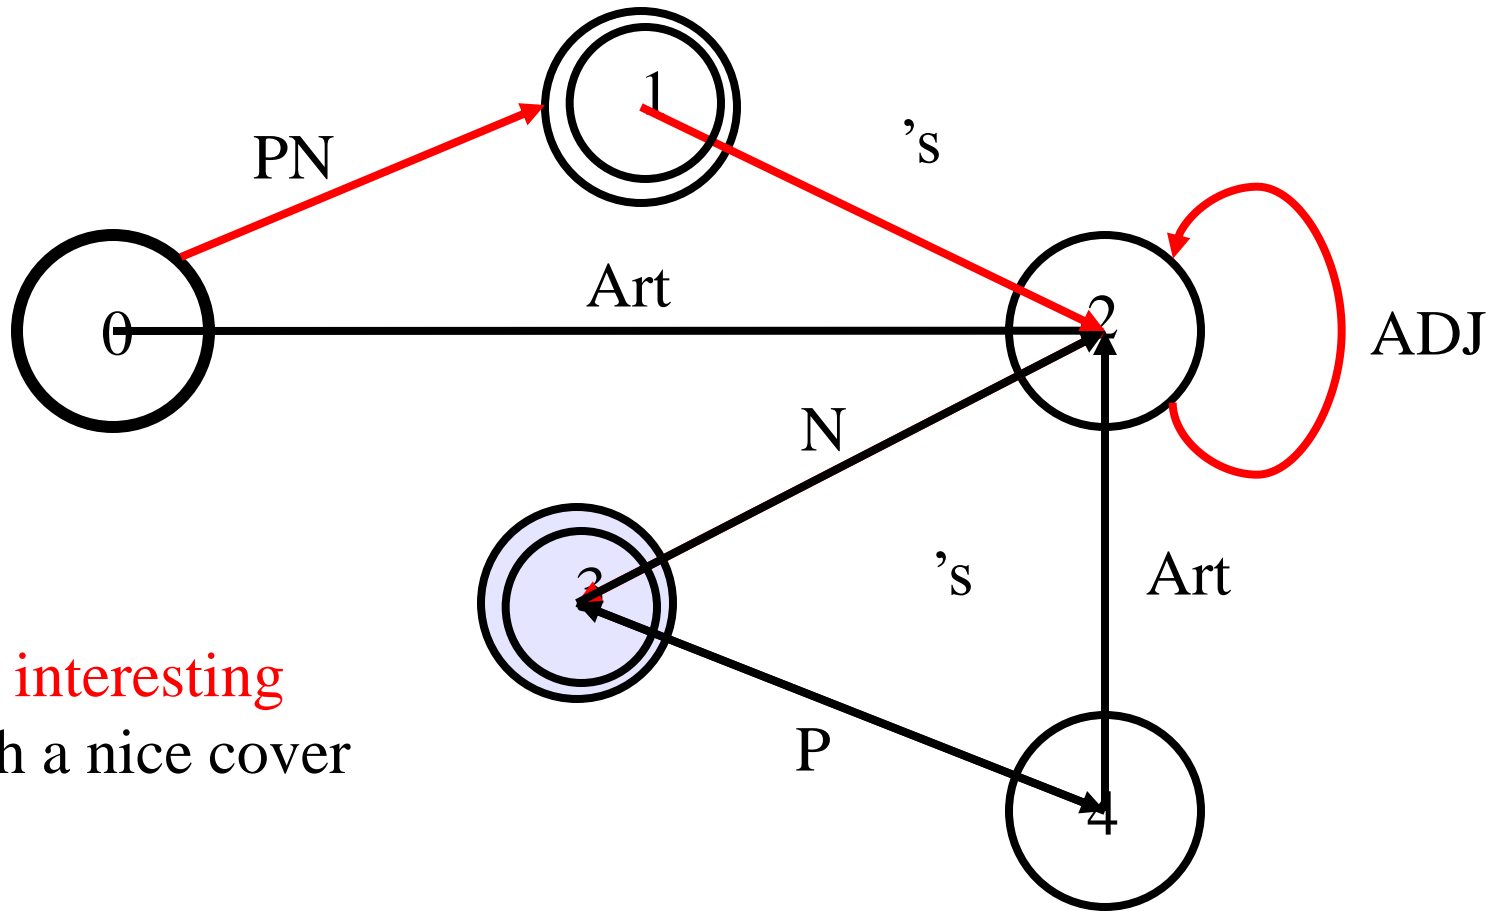


John's interesting
book with a nice cover

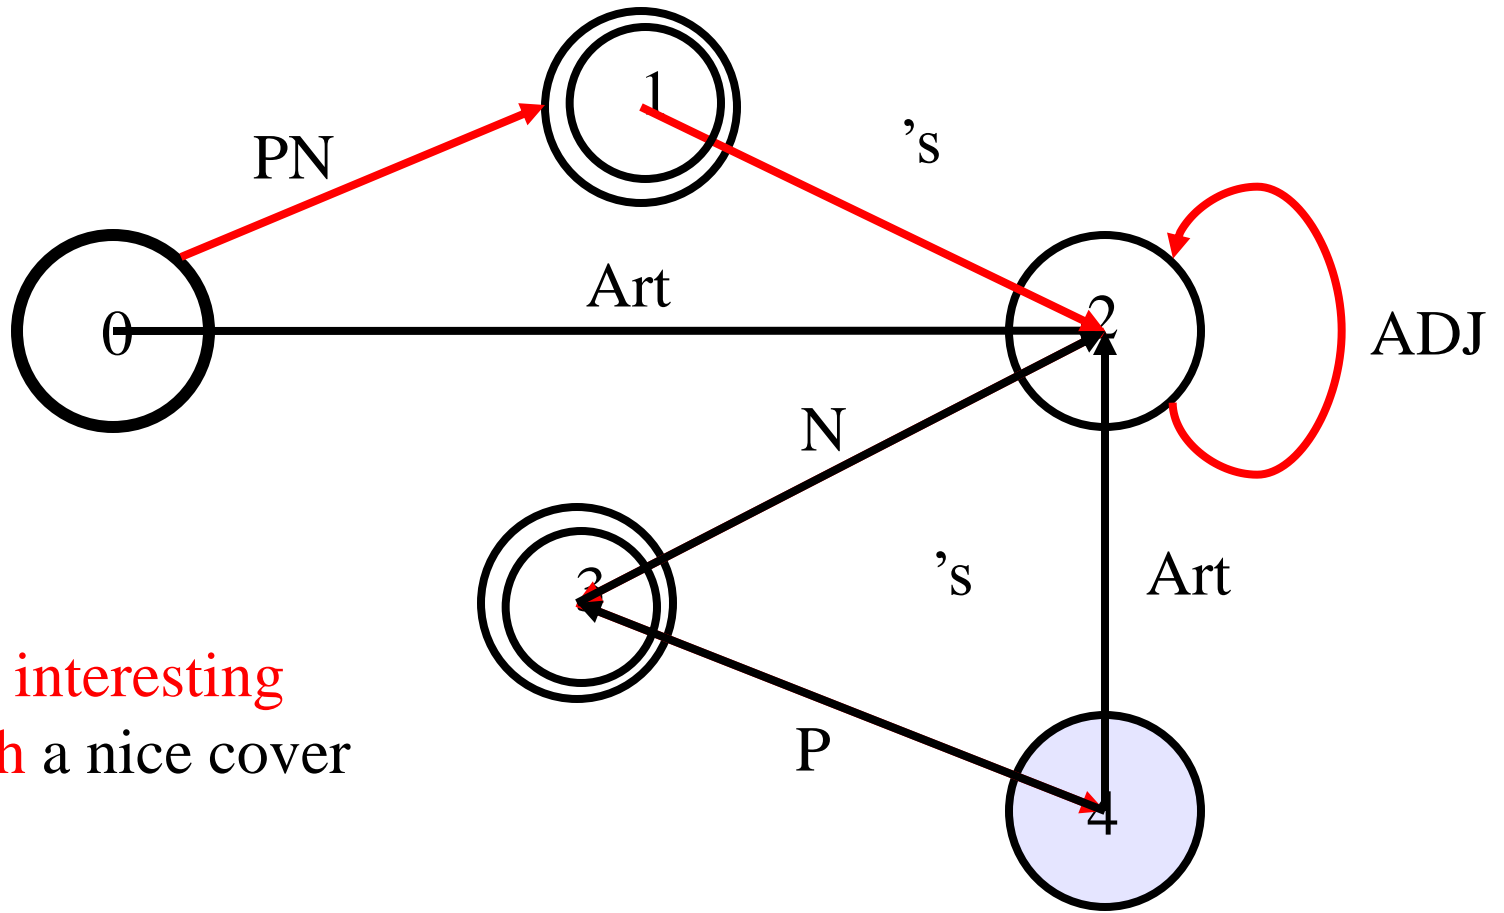

John's interesting
 book with a nice cover

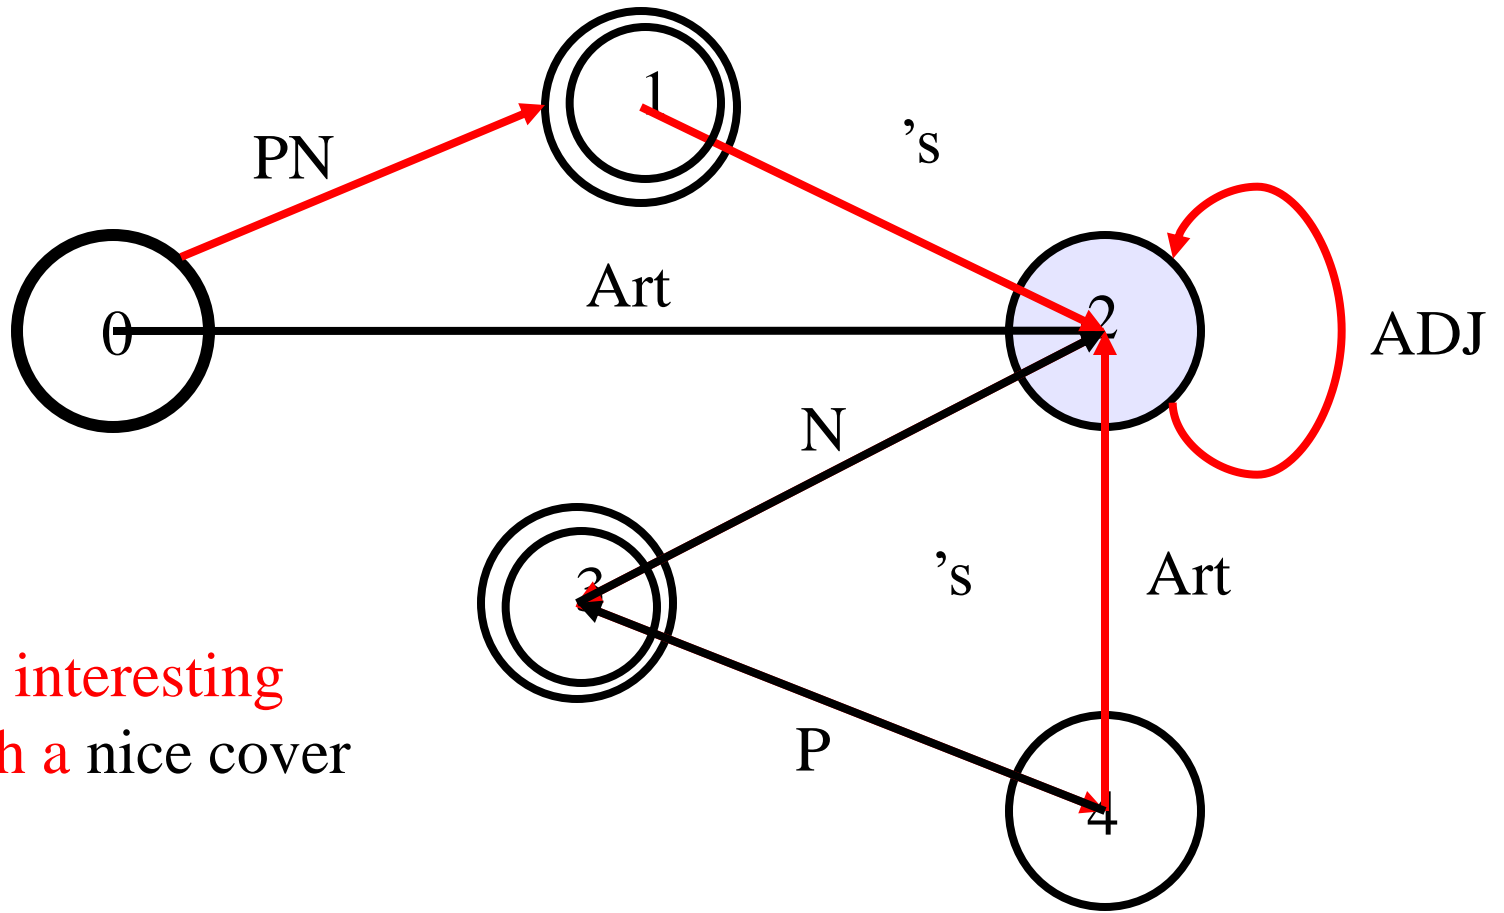


John's interesting
book with a nice cover

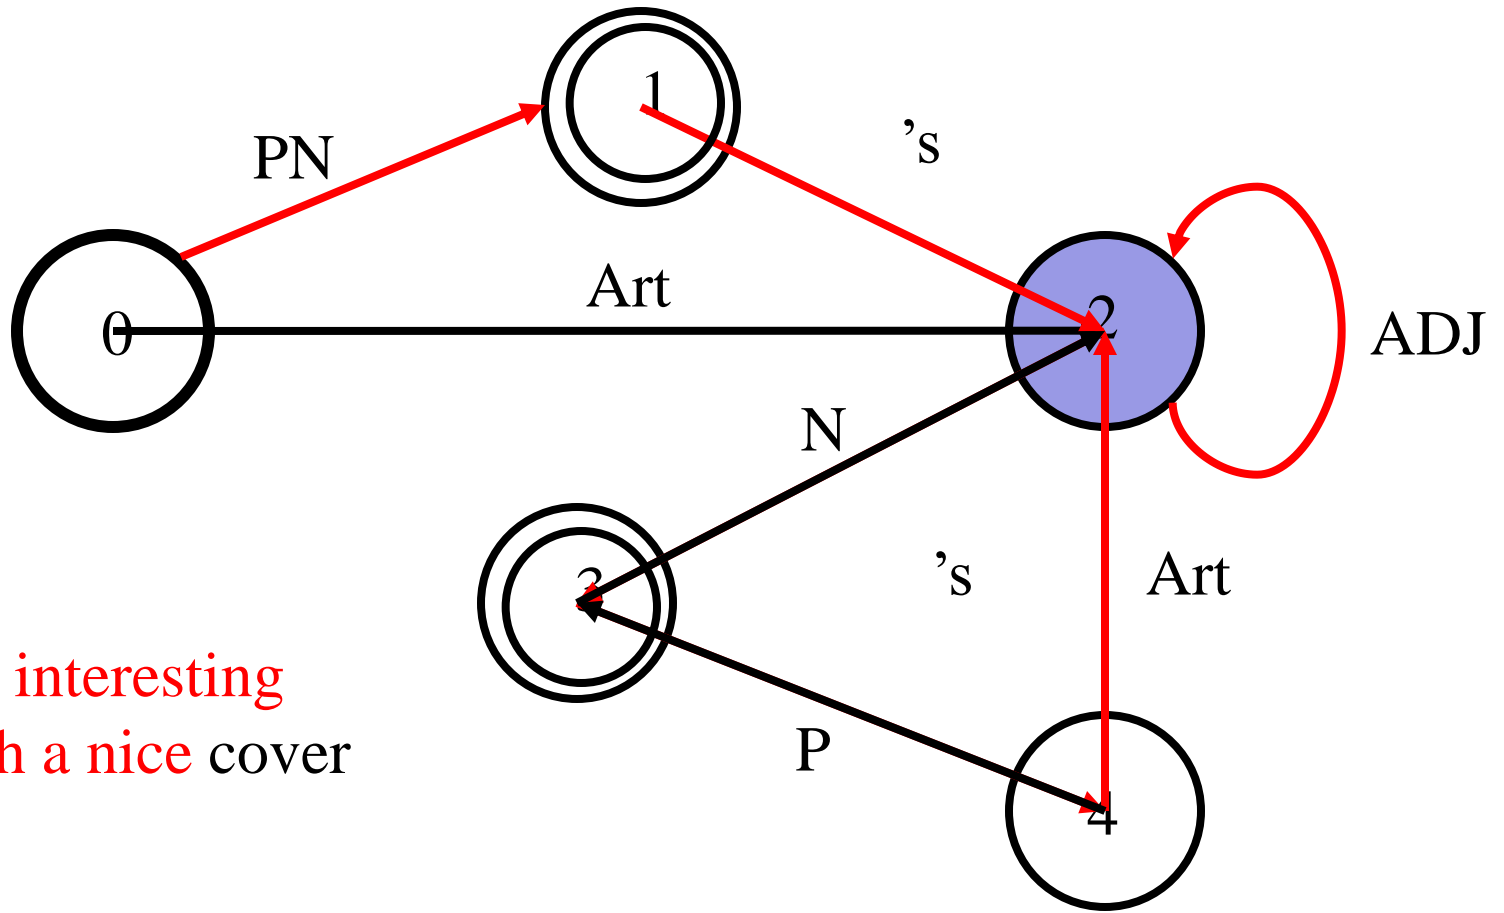


John's interesting
book with a nice cover

John's interesting
book with a nice cover

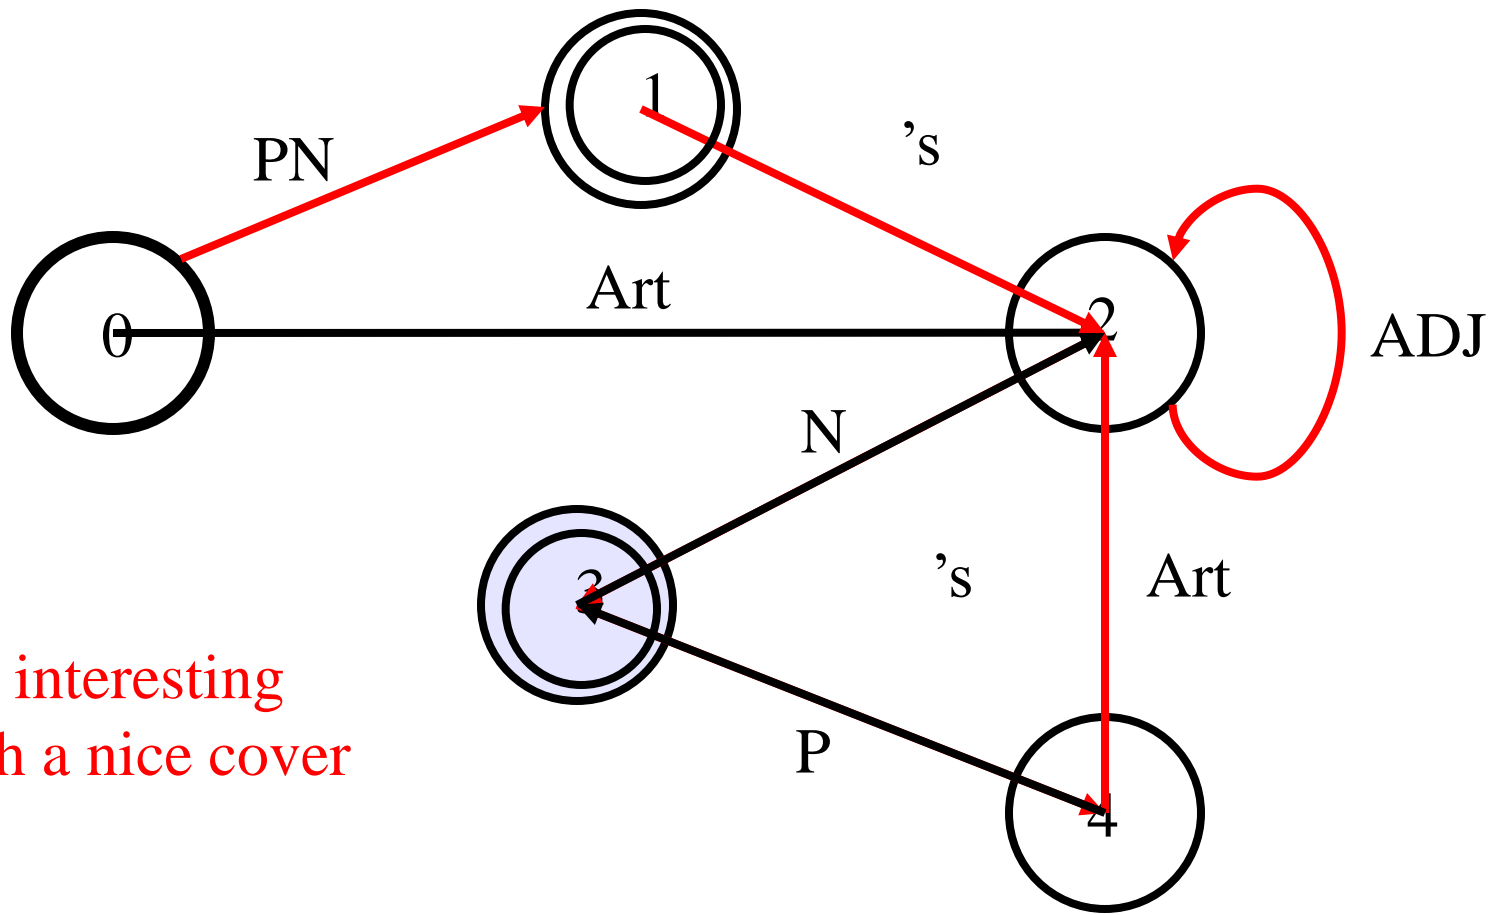

Pattern-matching


PN 's (ADJ)* N P Art (ADJ)* N

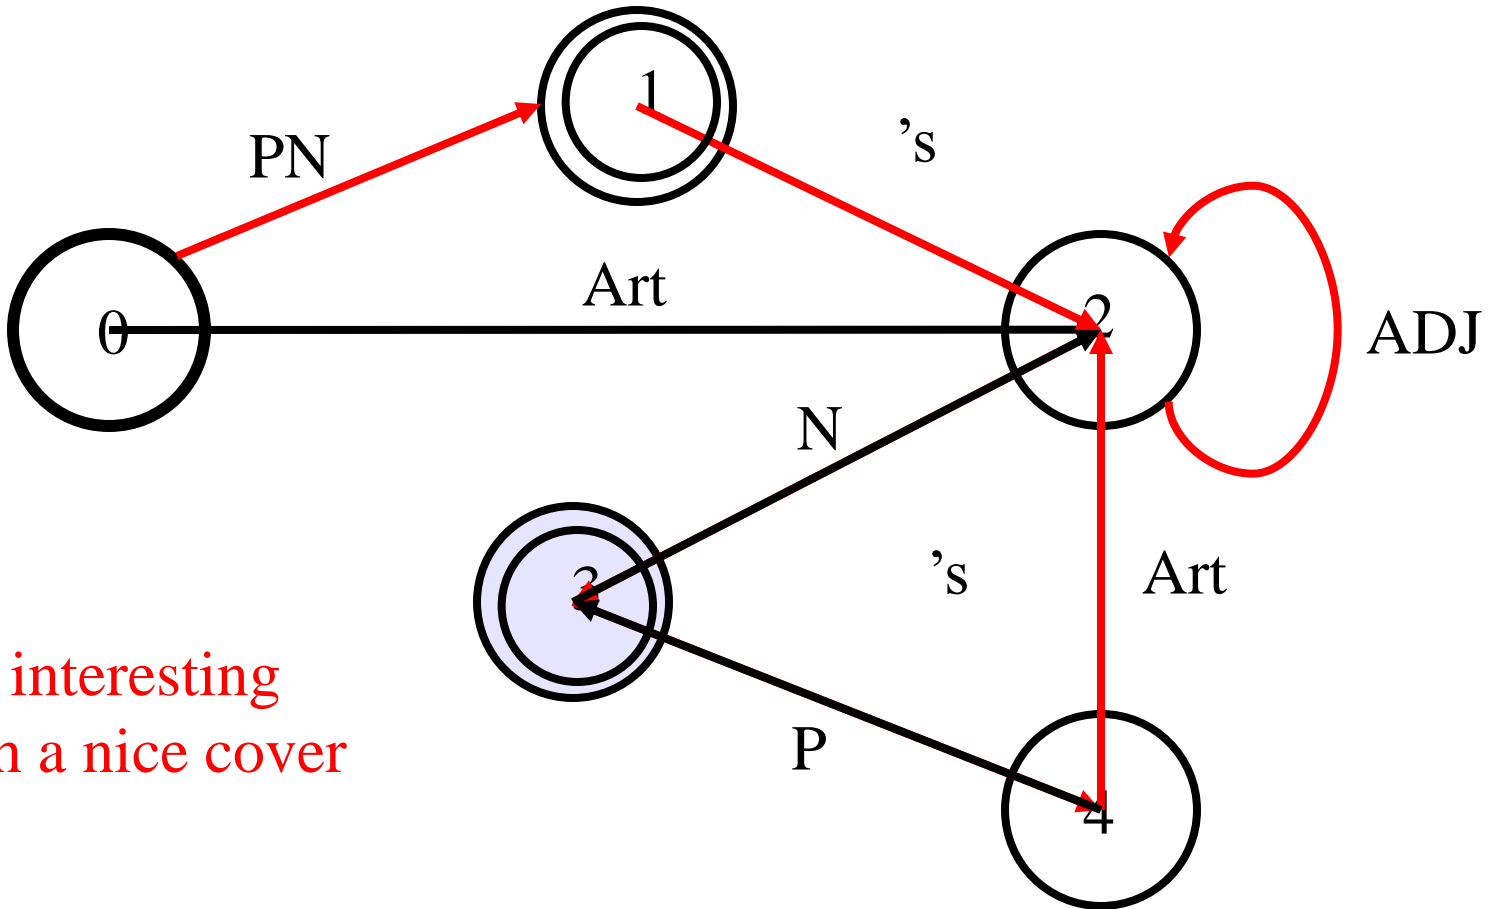

John's interesting
book with a nice cover


Syntactic Structure: Finite State Cascades

- functionally equivalent to composition of transducers,
 - but without intermediate structure output
 - the individual transducers are considerably smaller than a composed transducer

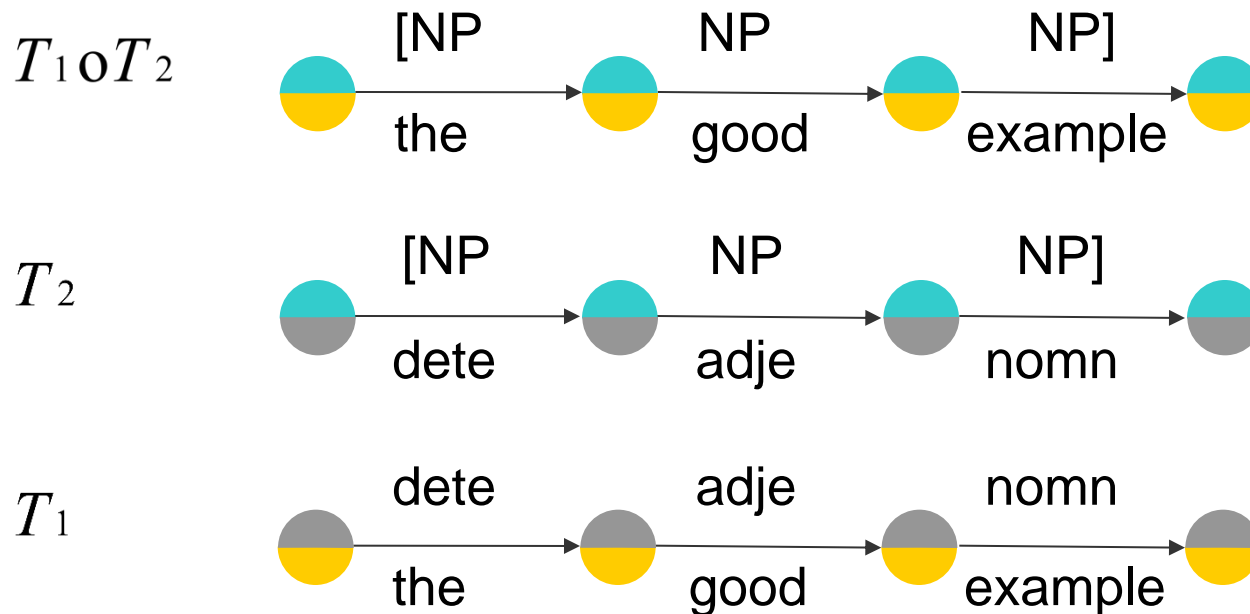

Syntactic Structure: Finite-State Cascades (Abney)

Finite-State Cascade

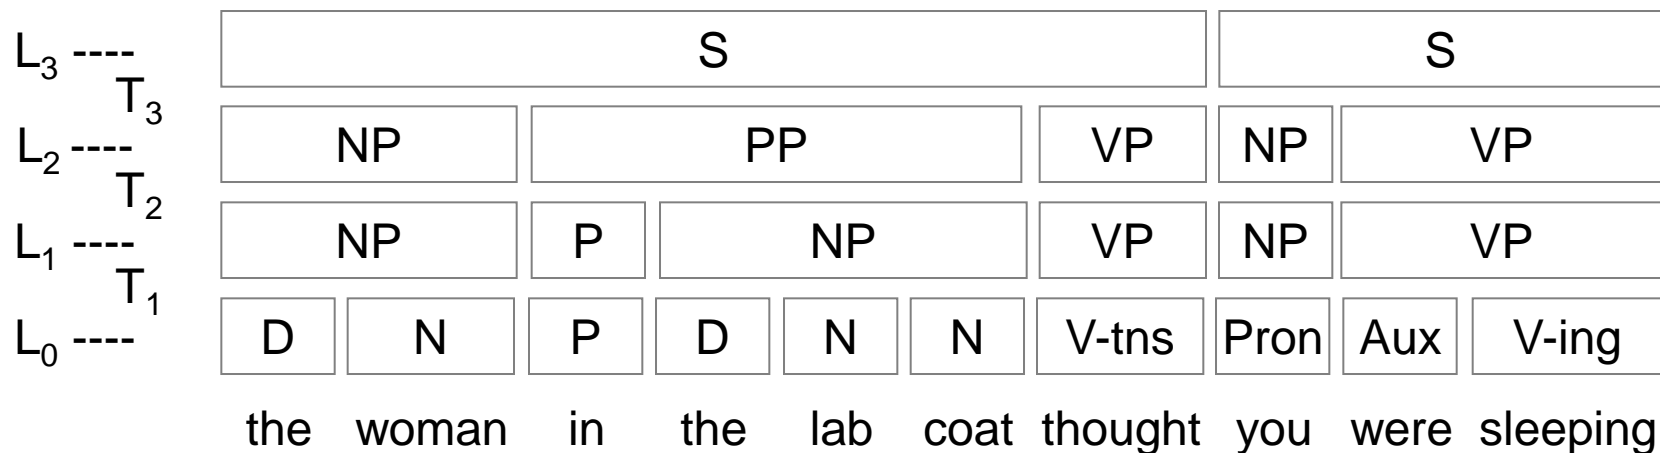

Regular-Expression Grammar

$$\begin{aligned}
 L_1 &: \left\{ \begin{array}{l} NP \rightarrow D? N^* N \\ VP \rightarrow V - tns \mid Aux V - ing \end{array} \right\} \\
 L_2 &: \{ PP \rightarrow P NP \} \\
 L_3 &: \{ S \rightarrow NP PP^* VP PP^* \}
 \end{aligned}$$

Syntactic Structure:

Finite-State Cascades (Abney)

- A cascade consists of a sequence of levels
- Phrases at one level are built on phrases at the previous level
- No recursion:
 - phrases never contain same level or higher level phrases
- Two levels of special importance
 - chunks: non-recursive cores (NX, VX) of major phrases (NP, VP)
 - simplex clauses: embedded clauses as siblings
- Patterns:
 - reliable indicators of bits of syntactic structure

An alternative FST cascade for German (free word order), Neumann et al.

Most partial parsing approaches following a bottom-up strategy:

Major steps

lexical processing

including morphological analysis, POS-tagging, Named Entity recognition

phrase recognition

general nominal and prepositional phrases, verb groups

clause recognition via domain-specific templates

templates triggered by domain-specific predicates attached to relevant verbs;
expressing domain-specific selectional restrictions for possible argument fillers

Bottom-up chunk parsing

perform clause recognition after phrase recognition is completed

However a bottom-up strategy showed to be problematic in case of German free text processing

Crucial properties of German

1. highly ambiguous morphology (e.g., case for nouns, tense for verbs)
2. free word/phrase order
3. splitting of verb groups into separated parts into which arbitrary phrases and clauses can be spliced in (e.g., Der Termin **findet** morgen **statt**. The date **takes place** tomorrow.)

Main problem in case of a bottom-up parsing approach:
Even recognition of simple sentence structure depends heavily on performance of phrase recognition.

NP ist gängige Praxis.


[NP Die vom Bundesgerichtshof und den Wettbewerbern als Verstoß gegen das Kartellverbot gezeißelte zentrale TV-Vermarktung] **ist gängige Praxis**.

NP ist gängige Praxis.

[NP Central television marketing criticized by the German Federal High Court and the guards against unfair competition as being an infringement of anti-cartel legislation] **is common practice**.

In order to overcome these problems we propose the following two phase divide-and-conquer strategy

Text (morph. analysed)

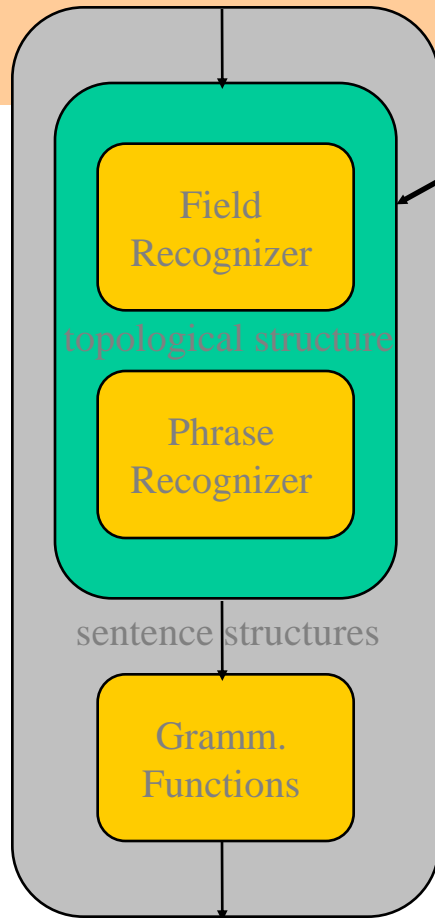

Fct. descriptions

Divide-and-conquer strategy

1. Recognize verb groups and topological structure (fields) of sentence domain-independently;


FrontField *Vfin* MiddleField *Vinfin* RestField

2. Apply general as well as domain-dependent phrasal grammars to the identified fields of the main and sub-clauses

[CoordS [CSent Diese Angaben konnte der Bundesgrenzschutz aber nicht bestätigen], [CSent Kinkel sprach von Horrorzahlen, [Relcl denen er keinen Glauben schenke]]].

This information couldn't be verified by the Border Police, Kinkel spoke of horrible figures that he didn't believe.

The divide-and-conquer parser is realized by means of a cascade of finite state grammars

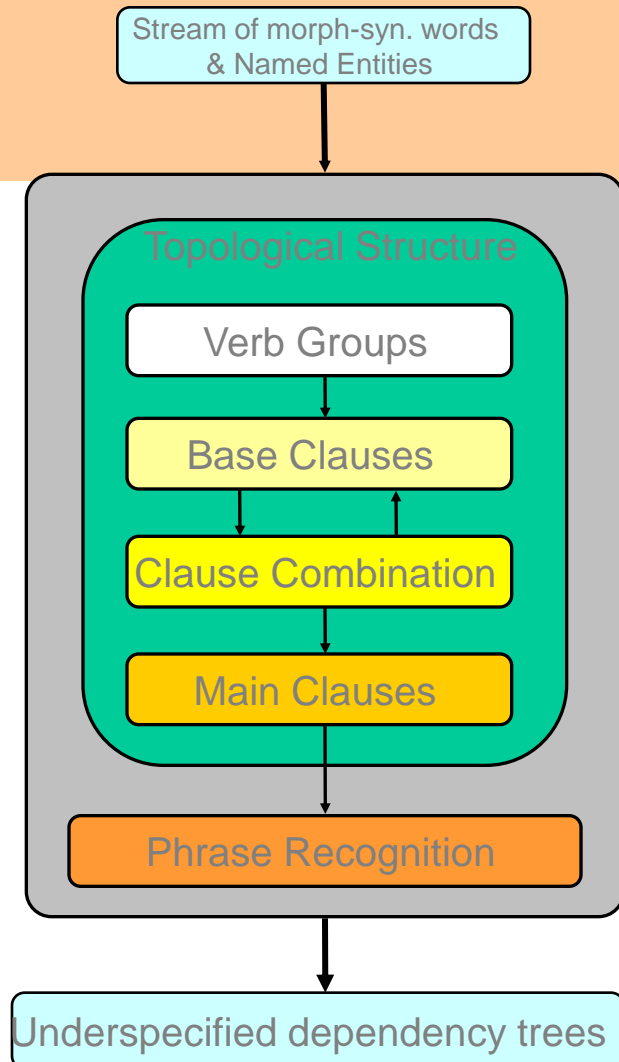

Weil die Siemens GmbH, die vom Export lebt, Verluste erlitt, mußte sie Aktien verkaufen.

[Because the Siemens Corp which strongly depends on exports suffered from losses they had to sell some shares.]

Weil die Siemens GmbH, die vom Export **Verb-FIN**, Verluste **Verb-FIN**, **Modv-FIN** sie Aktien **FV-Inf**.

Weil die Siemens GmbH, **Rel-Clause** Verluste **Verb-FIN**, **Modv-FIN** sie Aktien **FV-Inf**.

Subconj-Clause,
Modv-FIN sie Aktien **FV-Inf**.

Clause

Semantic Analysis

Sketch of Selected Approaches (1)

- **Chunk linking and chunk attachment (Abney)**
 - interpretation steps in partial parsing
 - linking of hitherto unconnected structures (attachment of modifiers, prepositional phrases, determination of subject and object)
 - interpretation basis: case frames, corpus examples
- **Finite state filtering (Grefenstette, 1999)**
 - layered finite-state parser
 - groups adjacent syntactically related units
 - extracts non-adjacent n-ary grammatical relations
 - high level specifications of regular expressions or describing the patterns to be extracted

Semantic Analysis

Sketch of Selected Approaches (2)

- **Head-modifier-pairs**

- mass data parsing with identifying pairs like [H: extract, M: information]
- used in information retrieval for enriching the document index and improving retrieval efficiency (Strzalkowski/Lin/Ge/Perez-Carballo, Jose (1999)).

- **Fact extraction in fixed domains**

- information patterns in highly standardized text types (weather forecasts, stock market reports)
- example: biography
 - [A-Z][a-z]*“, “[A-Z][a-z]*“, *[0-9]{4}“ in “[A-Z][a-z]*“, † „[0-9]{4}“ in “[A-Z][a-z]*
 - Buonarroti, Michelangelo, *1475 in Caprese , † 1564 in Roma

Semantic Analysis

Sketch of Selected Approaches (3)

- Message understanding

- filling in relational database templates from newswire texts
- approach of FASTUS ¹⁾: cascade of five transducers

- recognition of names,
- fixed form expressions,
- basic noun and verb groups
- patterns of events


Relationship	TIE-UP
Entities	Bridgestone Sports Co. a local concern a Japanese trading house
JV Company	-
Capitalization	-

- <company> <form><joint venture> with <company>
- "Bridgestone Sports Co. said Friday it has set up a joint venture in Taiwan with a local concern and a Japanese trading house to produce golf clubs to be shipped to Japan."
- identification of event structures that describe the same event

¹⁾ Hobbs/Appelt/Bear/Israel/Kehler/Martin/Meyers/Kameyama/Stickel/Tyson (1997)

Final State

- Introduction
- Morphology
- Syntax
- Semantics
- Summary

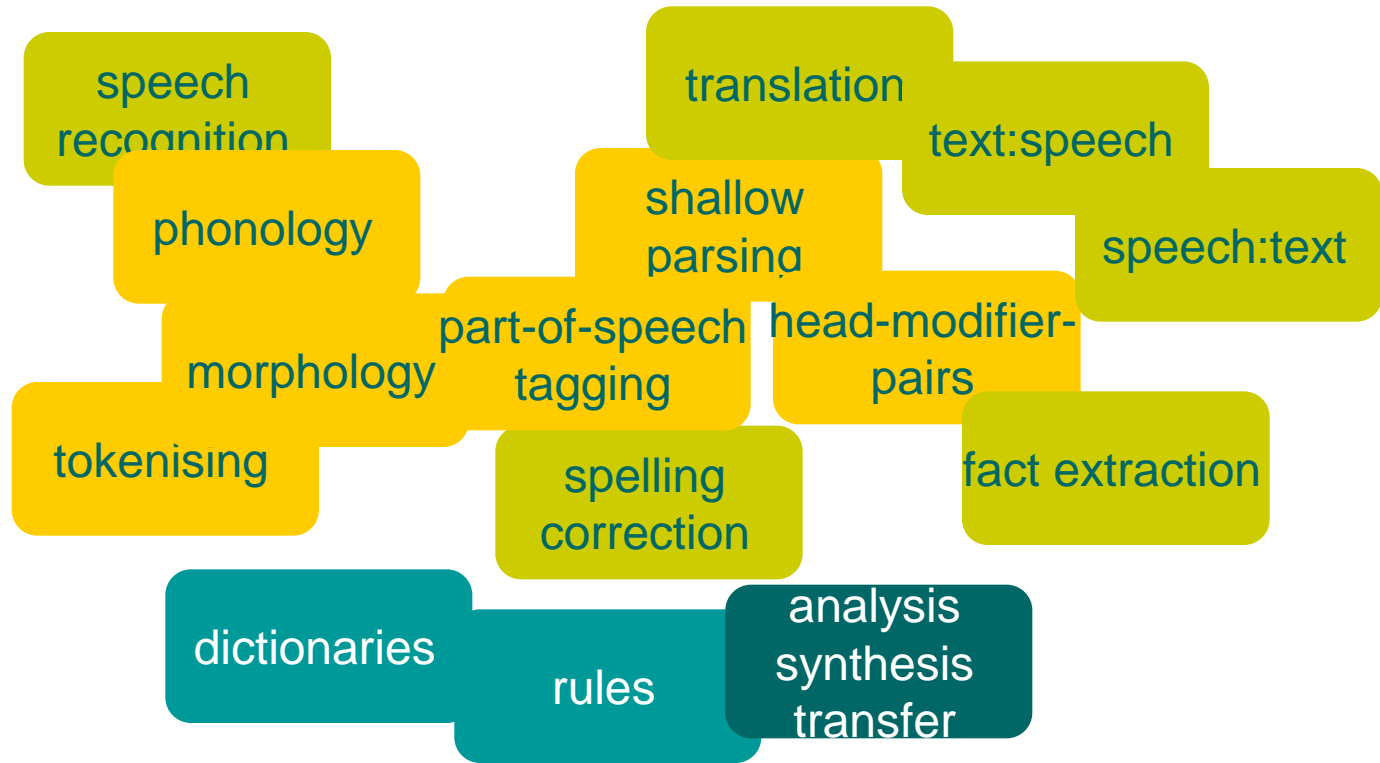

References

- Abney, Steven (1996). Tagging and Partial Parsing. In: Ken Church, Steve Young, and Gerrit Bloothoof (eds.), *Corpus-Based Methods in Language and Speech*. Kluwer Academic Publishers, Dordrecht. <http://www.vinartus.net/spa/95a.pdf>
- Abney, Steven (1996a) Cascaded Finite-State Parsing. Viewgraphs for a talk given at Xerox Research Centre, Grenoble, France. <http://www.vinartus.net/spa/96a.pdf>
- Abney, Steven (1995). Partial Parsing via Finite-State Cascades. In: *Journal of Natural Language Engineering*, 2(4): 337-344. <http://www.vinartus.net/spa/97a.pdf>
- Barton Jr., G. Edward; Berwick, Robert, C. und Eric Sven Ristad (1987). *Computational Complexity and Natural Language*. MIT Press.
- Beesley Kenneth R. und Lauri Karttunen (2003). *Finite-State Morphology*. Distributed for the Center for the Study of Language and Information. (CSLI- Studies in Computational Linguistics)
- Bod, Rens (1998). *Beyond Grammar. An Experienced-Based Theory of Language*. CSLI Lecture Notes, 88, Standford, California: Center for the Study of Information and Language
- Grefenstette, Gregory (1999). Light Parsing as Finite State Filtering. In: Kornai 1999, S. 86-94. earlier version in: *Workshop on Extended finite state models of language*, Budapest, Hungary, Aug 11--12, 1996. ECAI'96. <http://citeseer.nj.nec.com/grefenstette96light.html>
- Hobbs, Jerry; Doug Appelt, John Bear, David Israel, Andy Kehler, David Martin, Karen Meyers, Megumi Kameyama, Mark Stickel, Mabry Tyson (1997). *Breaking the Text Barrier*. FASTUS Presentation slides. SRI International. <http://www.ai.sri.com/~israel/Generic-FASTUS-talk.pdf>
- Jurafsky, Daniel und James H. Martin (2000): *Speech and Language Processing. An Introduction to Natural Language Processing, Computational Linguistics and Speech Recognition*. New Jersey: Prentice Hall.
- Kornai, András (ed.) (1999). *Extended Finite State Models of Language*. (Studies in Natural Language Processing). Cambridge: Cambridge University Press.
- Koskenniemi, Kimmo (1983). *Two-level morphology: a general computational model for word-form recognition and production*. Publication 11, University of Helsinki. Helsinki: Department of Genral Linguistics

References

- Kunze, Jürgen (2001). Computerlinguistik. Voraussetzungen, Grundlagen, Werkzeuge. Vorlesungsskript. Humboldt Universität zu Berlin. http://www2.rz.hu-berlin.de/compling/Lehrstuhl/Skripte/Computerlinguistik_1/index.html
- Manning, Christopher D.; Schütze, Hinrich (1999). Foundations of Statistical Natural Language Processing. Cambridge, Mass., London: The MIT Press. <http://www.sultry.arts.usyd.edu.au/fsnlp>
- Mohri, Mehryar (1997). Finite State Transducers in Language and Speech Processing. In: Computational Linguistics, 23, 2, 1997, S. 269-311. <http://citeseer.nj.nec.com/mohri97finitestate.html>
- Mohri, Mehryar (1996). On some Applications of finite-state automata theory to natural language processing. In: Journal of Natural Language Engineering, 2, S. 1-20.
- Mohri, Mehryar und Michael Riley (2002). Weighted Finite-State Transducers in Speech Recognition (Tutorial). Teil 1: <http://www.research.att.com/~mohri/postscript/icslp.ps>, Teil 2: <http://www.research.att.com/~mohri/postscript/icslp-tut2.ps>
- G. Neumann, C. Braun and J. Piskorski (2000) [A Divide-and-Conquer Strategy for Shallow Parsing of German Free Texts](#) Proceedings of ANLP-2000, Seattle, Washington, pages 239-246
- Partee, Barbara; ter Meulen, Alice and Robert E. Wall (1993). Mathematical Methods in Linguistics. Dordrecht: Kluwer Academic Publishers.
- Pereira, Fernando C. N. and Rebecca N. Wright (1997). Finite-State Approximation of Phrase-Structure Grammars. In: Roche/Schabes 1997.
- Roche, Emmanuel und Yves Schabes (Eds.) (1997). Finite-State Language Processing. Cambridge (Mass.) und London: MIT Press.
- Sproat, Richard (2002). The Linguistic Significance of Finite-State Techniques. February 18, 2002. <http://www.research.att.com/~rws>
- Strzalkowski, Tomek; Lin, Fang; Ge, Jin Wang; Perez-Carballo, Jose (1999). Evaluating Natural Language Processing Techniques in Information Retrieval. In: Strzalkowski, Tomek (Ed.): Natural Language Information Retrieval, Kluwer Academic Publishers, Holland : 113-145
- Woods, W.A. (1970). Transition Network Grammar for Natural Language Analysis. In:

Named Entity Extraction

Machine Learning for
Named Entity
Extraction

The who, where, when & how much in a sentence

- The task: identify lexical and phrasal information in text which express references to named entities NE, e.g.,
 - person names
 - company/organization names
 - locations
 - dates×
 - percentages
 - monetary amounts
- Determination of an NE
 - Specific type according to some taxonomy
 - Canonical representation (template structure)

Example of NE-annotated text

Delimit the named entities in a text and tag them with NE types:

```
<ENAMEX TYPE=„LOCATION“>Italy</ENAMEX>'s business world was rocked by  
the announcement <TIMEX TYPE=„DATE“>last Thursday</TIMEX> that Mr.  
<ENAMEX TYPE=„PERSON“>Verdi</ENAMEX> would leave his job as vice-  
president of <ENAMEX TYPE=„ORGANIZATION“>Music Masters of Milan,  
Inc</ENAMEX> to become operations director of  
<ENAMEX TYPE=„ORGANIZATION“>Arthur Andersen</ENAMEX>.
```

- „Milan“ is part of organization name
- „Arthur Andersen“ is a company
- „Italy“ is sentence-initial – capitalization useless

NE and Question-Answering

- Often, the expected answer type of a question is a NE
 - What was the name of the first Russian astronaut to do a spacewalk?
 - Expected answer type is PERSON
 - Name the five most important software companies!
 - Expected answer type is a list of COMPANY
 - Where is does the ESLLI 2004 take place?
 - Expected answer type is LOCATION (subtype COUNTRY or TOWN)
 - When will be the next talk?
 - Expected answer type is DATE

Difficulties of Automatic NEE

- NEs can't be enumerated in order to include them in dictionaries/Gazetteers
 - Names are changing constantly
 - Names vary in form
 - Subsequent occurrences of names might be abbreviated
- list search/matching does not perform well
 - context based pattern matching needed

Difficulties for Pattern Matching Approach

Whether a phrase is a named entity, and what name class it has, depends on

- Internal structure:

 - „Mr. Brandon“

- Context:

 - „The new company, SafeTek, will make air bags.“

- Feiyu Xu, researcher at DFKI, Saarbrücken

NEE is an interesting problem

- Productivity of name creation requires lexicon free pattern recognition
- NE ambiguity requires resolution methods
- Fine-grained NE classification needs fine-grained decision making methods
 - Taxonomy learning
- Multi-linguality
 - A text might contain NE expressions from different languages, e.g., output of *IdentiFinder*TM
 - Pilot challenge in ACE'2007
 - Extract all NEs mentioned in a Mandarin/Arabic text
 - Translate them into English

Statistical and Rule-Based NEE

- Identify a type of NE from charpos S to charpos E

- Giuseppe Verdi, Italian composer of „Aida“
<NE TYPE=„PERSON“>Giuseppe Verdi</NE>

- Recognize structured entities with rule-based systems

- Prof. Dr. Wolfgang Wahlster, CEO of DFKI GmbH

- <NE TYPE=„PERSON“>

- <ELTS> <NE TYPE=„TITLE“>Prof. Dr. </NE>

- <NE TYPE=„FIRSTNAME“>Wolfgang</NE>

- <NE TYPE=„LASTNAME“>Wahlster</NE>

- <NE TYPE=„FUNCTION“>CEO</NE>

- <NE TYPE=„COMPANY“>

- <ELTS> <NE TYPE „NAME“>DFKI</NE>

- <NE TYPE „DGNR“>GmbH</NE>

- </ELTS></NE>

- </ELTS> </NE>

Why Machine Learning NEE?

- **System-based adaptation for new domains**
 - Fast development cycle
 - Manual specification too expensive
 - Language-independence of learning algorithms
 - NL-tools for feature extraction available, often as open-source
- **Current approaches already show near-human-like performance**
 - Can easily be integrated with externally available Gazetteers
- **High innovation potential**
 - Core learning algorithms are language independent, which supports multi-linguality
 - Novel combinations with relational learning approaches
 - Close relationship to currently developed ML-approaches of reference resolution

Different Kinds of Preprocessing

- Character-level features
 - (Whitelaw&Patrick, CoNLL, 2003)
- Tokenization
 - (Bikel et al., ANLP 1997)
- POS + lemmatization
 - (Yangarber et al. Coling 2002)
- Morphology
 - (Cucerzan&Yarowsky, EMNLP 1999)
- Full parsing
 - (Collins&Singer, EMNLP 1999)

Different ML approaches to NEE

- **Supervised learning**
 - Training is based on available very large annotated corpora
 - Mainly statistics-based methods are used, e.g. HMM, MEM, connectionist models, SVM, hybrid ML-methods (cf. <http://www.cnts.ua.ac.be/conll2003/ner/>)
- **Semi-supervised learning**
 - Training only needs very few seeds
 - Very large un-annotated corpus, usually larger than for supervised learning
- **Unsupervised Learning**
 - Typical approach is clustering, e.g., cluster NEs on basis of similar context (common syntagmatic relationship). Problem: naming the clusters, e.g., using WordNet labels, cf. (Alfonseca and Mandandhar, 2004)
 - Hypernym rules, e.g., “X such as A, B, C” -> A, B, C are NEs of type X, cf. (Evans 2003)

Semi-Supervised NEE: Sketch

- Define manually a small set of trusted seeds
- Training uses un-labeled data
- Initialize system by labeling the corpus with the analysis of the seed
- Extract and generalize patterns from the context of the seeds
- Use the patterns to further label the corpus and to extend the seed set (**bootstrapping**)
- Repeat the process until no new terms can be identified

[See lecture on Relation Extraction for more on this.]

References for NEE

- Alfonseca, Enrique; Manandhar, S. 2002. An Unsupervised Method for General Named Entity Recognition and Automated Concept Discovery. In Proc. International Conference on General WordNet.
- D. Bikel, S. Miller, Richard Schwartz and Ralph Weischedel: "Nymble: a High-Performance Learning Name Finder" ANLP 1997.
- Chen, H. H.; Lee, J. C. 1996. Identification and Classification of Proper Nouns in Chinese Texts. In Proc. International Conference on Computational Linguistics.
- M. Collins, Y. Singer "Unsupervised Models for Named Entity Classification", EMNLP 1999.
- Drozdzyński, Witold; Krieger, Hans-Ulrich; Piskorski, Jakub; Schäfer, Ulrich, Xu Feiyu. 2004. Shallow Processing with Unification and Typed Feature Structures - Foundations and Applications. *Künstliche Intelligenz* 1(1), 17-23, (http://www.dfki.de/lt/publication_show.php?id=1295)
- Evans, Richard. 2003. A Framework for Named Entity Recognition in the Open Domain. In Proc. Recent Advances in Natural Language Processing.
- Fleischman, Michael; Hovy. E. 2002. Fine Grained Classification of Named Entities. In Proc. Conference on Computational Linguistics.
- Huang, Fei. 2005. Multilingual Named Entity Extraction and Translation from Text and Speech. Ph.D. Thesis. Pittsburgh: Carnegie Mellon University.
- Lin, Yangarber, Grishman, ICML 2003
- A. McCallum and W. Li, "Early Results for Named Entity Recognition with Conditional Random Fields, Features Induction and Web-Enhanced Lexicons", CoNLL 2003.
- Nadeau, David, Satoshi Sekine (2006). A survey of named entity recognition and classification, Special issue of *Linguisticæ Investigationes* 30:1 (2007) (Available from Günter Neumann, DFKI LT Lab.)
- Neumann (2007): web course page - <http://www.dfki.de/%7Eneumann/meta-ner/SoftWareProject.html>
- http://en.wikipedia.org/wiki/Named_entity_recognition
- E. Riloff, R. Jones: "Learning Dictionaries for Information Extraction by Multi-Level Bootstrapping", AAAI 1999.
- Yangarber, Lin, Grishman, Coling 2002